


The Bob Each Way 65 profile is a compact uplight/downlight solution. A versatile system suitable for various mounting options, Bob Each Way 65 can be surface mounted, wall mounted and suspended on either wire or rod suspensions.

MOUNTING OPTIONS	DIFFUSER OPTIONS	SUPER SERIES LED STRIP OPTIONS			SUPER SERIES LED STRIP OPTIONS		
		Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.
Surface mounted	Opal	310lm		2700K	1955lm		2700K
Rod suspended	Clear	330lm	3W	3000K	2060lm	20W	3000K
Wire suspended	Prismatic	345lm		4000K	2160lm		4000K
Wall mounted		760lm		2700K	2400lm		2700K
		800lm	7W	3000K	2530lm	26W	3000K
		840lm		4000K	2650lm		4000K
		1520lm		2700K			
		1600lm	14W	3000K			
		1680lm		4000K			



- LED strip options vary depending on region - please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES

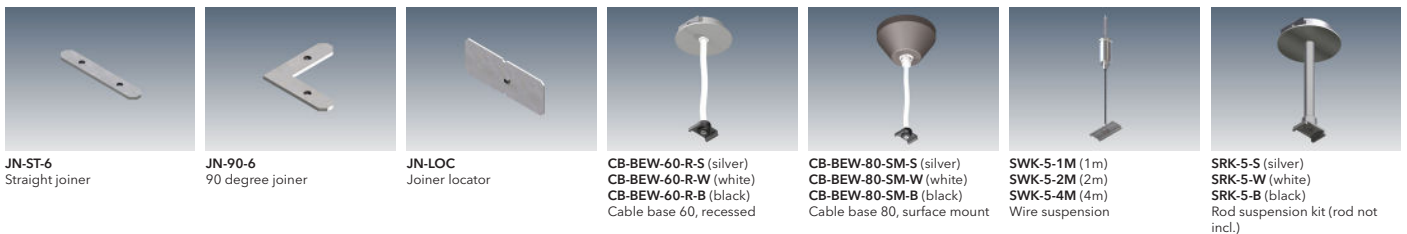

JN-ST-6
Straight joiner

JN-90-6
90 degree joiner

JN-LOC
Joiner locator

CB-BEW-60-R-S (silver)
CB-BEW-60-R-W (white)
CB-BEW-60-R-B (black)
Cable base 60, recessed

CB-BEW-80-SM-S (silver)
CB-BEW-80-SM-W (white)
CB-BEW-80-SM-B (black)
Cable base 80, surface mount

SWK-5-1M (1m)
SWK-5-2M (2m)
SWK-5-4M (4m)
Wire suspension

SRK-5-S (silver)
SRK-5-W (white)
SRK-5-B (black)
Rod suspension kit (rod not incl.)



SRK-10-S (silver)
SRK-10-W (white)
SRK-10-B (black)
Rod suspension kit (rod not incl.)

ROD-0.5M (0.5m)
ROD-1M (1m)
ROD-2M (2m)
Suspension rod - 0.5m, 1m, 2m (can be cut to length)


WB-BEW
Wall bracket

DR-EN-1 (no suspension)
DR-EN-1-SWK-5-1M (with 1m wire suspension)
DR-EN-1-SWK-5-2M (with 2m wire suspension)
DR-EN-1-SWK-5-4M (with 4m wire suspension)
Driver enclosure for 100W Triac dimmable driver (with or without integrated wire suspension)

DR-EN-2 (no suspension)
DR-EN-2-SWK-5-1M (with 1m wire suspension)
DR-EN-2-SWK-5-2M (with 2m wire suspension)
DR-EN-2-SWK-5-4M (with 4m wire suspension)
Driver enclosure for Tridonic dimmable & non-dimmable driver (with or without 1m, 2m or 4m integrated wire suspension)

ADDITIONAL INFORMATION

Applications Task lighting over kitchen islands or reception counters, mirror lighting.
Installation Interior or exterior (with IP65/IP67 rated LED strip).
Materials Extruded aluminium body, polycarbonate diffusers, aluminium end caps.
Finish Natural silver anodised or custom powder coat.
Light source LED ribbon strip.
Power supply 24V DC - remote driver options ranging from 6W up to 320W.
Dimmable Various options available, please enquire.

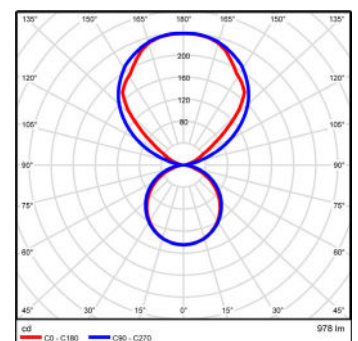

Polar curve for 1890 lumen LED strip down with opal diffuser and 1340 lumen LED strip up with clear diffuser.

