

A high-density RGBW strip has long been the stuff of fairy tales - until now. Spec Series RGBW strip has a pitch of only 8.3mm which makes it dot-free in many of our profiles.

Spec Series RGBW is a high-density RGBW strip with a pitch of only 8.3mm




CODE	WATTS P/M	COLOUR	LUMENS P/M	LEDS P/M	CUTTING LENGTH	MAX. RUN PER FEED	PROTECTION
SPEC-14.4-RGB-9.6-30	14.4W RGB, 9.6W White	RGB+3000K	810 White	120	50.00mm	5M	IP20, IP65

For IP65 versions, add "-IP65" to end of codes above. Example code: SPEC-14.4-RGB-9.6-30-IP65.

IP65 versions reduce above stated lumen figures by 5%.

Wattage and lumen tolerance +/- 10%. Colour temperature tolerance for white LEDs +/- 5%.

SPEC-14.4-RGB-9.6-30

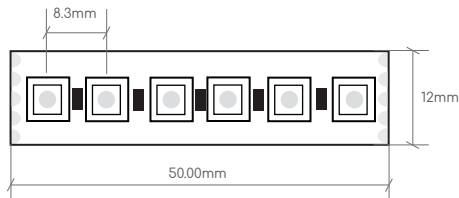

IP20 dimensions:
W12x H2mm



IP65 dimensions:
W14 x H4mm
End Caps: W16 x H6mm

*Warranty applies only when mounted in an appropriate Offspring Profiles's extrusion.

ADDITIONAL INFORMATION

Input voltage: 24V DC
Spec Series RGBW strip is supplied in 5m rolls.

Source life: L70 = 50,000 hours
Backing: 3M VHB tape.

Control: Dimmable by PWM
Beam angle: 120°