

The Sweet 16 profile is a powerful, compact uplight/downlight solution. With a single LED strip for downlighting and two for uplighting, Sweet 16 is ideal for applications where high output and low-glare is key, such as boardrooms, reception counters and kitchen islands. Sweet 16 can be wired with two independent, dimmable circuits to achieve the perfect amount of light. Both wire and rod suspension options are available.

MOUNTING OPTIONS	DIFFUSER OPTIONS	SUPER SERIES LED STRIP OPTIONS		
Rod suspended	Opal	Lumens per metre	Watts per metre	Colour temp.
Wire suspended	Clear	310lm	3W	2700K
Wall mounted	Prismatic	330lm		3000K
		345lm		4000K
		760lm	7W	2700K
		800lm		3000K
		840lm		4000K
		1520lm	14W	2700K
		1600lm		3000K
		1680lm		4000K
		1955lm	20W	2700K
		2060lm		3000K
		2160lm		4000K
		2400lm	26W	2700K
		2530lm		3000K
		2650lm		4000K


- LED strip options vary depending on region - please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES

						
JN-ST-6 Straight joiner	JN-90-6 90 degree joiner	CB-S16-60-R-S / CB-S16-60-R-W / CB-S16-60-R-B Cable base 60, recessed	CB-S16-80-SM-S / CB-S16-80-SM-W / CB-S16-80-SM-B Cable base 80, surface mount	SWK-V-1M / SWK-V-2M / SWK-V-4M Wire suspension	SRK-3-S / SRK-3-W / SRK-3-B Rod suspension kit (rod not incl.)	SRK-8-S / SRK-8-W / SRK-8-B Rod suspension kit (rod not incl.)
						
ROD-0.5M / ROD-1M / ROD-2M Suspension rod - 0.5m, 1m, 2m	WB-S16 Wall bracket	DR-EN-1 (no suspension) DR-EN-1-SWK-V1 (with 1m wire suspension) DR-EN-1-SWK-V2 (with 2m wire suspension) DR-EN-1-SWK-V4 (with 4m wire suspension) Driver enclosure for 100W Triac dimmable driver (with or without integrated wire suspension)	DR-EN-2 (no suspension) DR-EN-2-SWK-V1 (with 1m wire suspension) DR-EN-2-SWK-V2 (with 2m wire suspension) DR-EN-2-SWK-V4 (with 4m wire suspension) Driver enclosure for Tridonic dimmable & non-dimmable driver (with or without 1m, 2m or 4m integrated wire suspension)	SML-16 Seismic restraint lug (prevents wire suspensions from moving in profile)		

ADDITIONAL INFORMATION

Applications	Kitchen islands, boardroom tables, reception counters, office spaces.
Installation	Interior only.
Materials	Extruded aluminium body, polycarbonate diffuser, aluminium end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

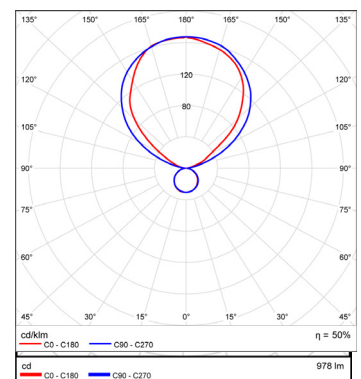

Polar curve for 3x1340 lumen LED strips with clear diffuser up and opal down.

